
Fans

CKV 75

Small radial fan made of plastic



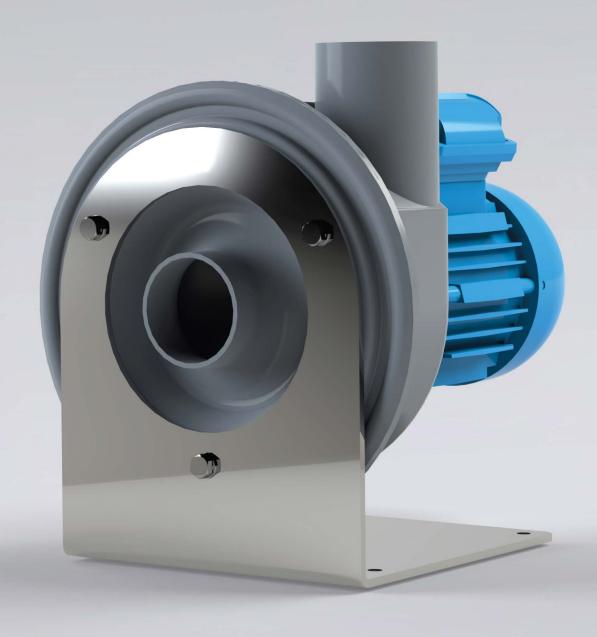

The Colasit CKV small radial fan can be installed quickly and easily in any suitable position. It weighs less than 10 kg. The Inlet and outlet nozzles are suitable for DN 75 coupling connections (standard pipe).

Construction

- One stage, suction on one side
- Direct drive
- CE marking

Characteristics

Volume flow

min. 50 m³/h to max. 350 m³/h

Static pressure

min. 35 Pa to max. 450 Pa

Efficiency (tot. mech.)

max. 42%

Inlet and outlet Ø

75 mm

Housing

- Available in PPs
- Self-supporting shell construction
- Vacuum formed
- Inlet cover can easily be removed to clean the fan
- Counterclockwise rotation

Impeller

- Available in PPs
- Injection molded
- Transmission of force via fully plastic-coated aluminum hub
- Adapter for simple impeller mounting

Support

- Available with powder-coated finish
- Sturdy sheet metal construction

Drive

- Direct drive: Impeller mounted directly on motor shaft

Motor: Asynchronous motor

Accessories/options

Required


- Vibration absorbers for floor mounting
- Vibration absorbers for ceiling mounting
- Sleeves as flexible connection or protective grid
- Isolation switch

Optional

- Frequency converter for speed control

Dimensions

75 mm



Small radial fan CKV 75

Plastic fans from Colasit

Since its founding in 1945, Colasit has grown to be a leading provider of fans made of corrosion-resistant plastics. Colasit has been setting the standard within its product lines for many decades. Hundreds of thousands of Colasit fans are improving air quality in the industrial sector in laboratories and building technology around the world.

Swiss quality with global support

Fan development and plastic component production take place in Switzerland to guarantee our exceptional quality. Colasit and its distribution sites all around the world provide professional consultation, sales, on-site assembly of plastic fans, installation, and service.


Key features

Colasit plastic fans are a durable, energy-efficient solution. Process reliability is what we ultimately offer. Our ATEX-compliant fans offer maximum safety even in potentially explosive atmospheres (Zone 1 or 2).

Online configurator ColaVent®/BIM

Our comprehensive product range provides excellent coverage of requirements for flow rates up to 130 000 m³/h and static pressures up to 7000 Pa. Colasit supports planners, engineers, and operators in designing plastic fans from Colasit with the ColaVent® online configurator at **www.colasit.com/colavent**. Colasit also provides the BIM data necessary for design.

https://colasit.partcommunity.com

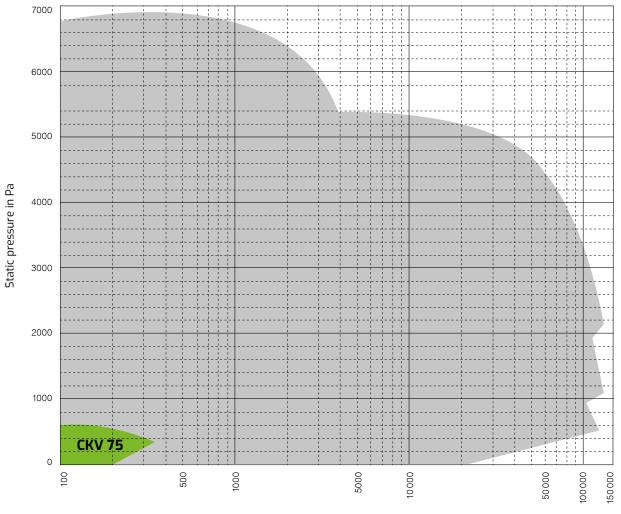

Flow rate in m³/h

Worldwide

Colasit is a worldwide leading provider of chemically resistant fans, exhaust air purification systems, ventilation systems for corrosive and environmentally harmful exhaust air and gases as well as apparatus and processing systems for chemically aggressive liquid media.





Exhaust air purification systems made of plastic for treating environmentally hazardous exhaust air and gases



Plastic fans for efficient and safe conveying of corrosive exhaust air and gases



Ventilation systems made of plastic for efficient routing of corrosive exhaust air and gases



Processing systems, containers, vessels, and equipment for safe handling of chemically aggressive liquid media



Installation, repair, and replacement parts services



Consultation and engineering services in plastic construction for individual components to entire systems



Plastic construction • Faulenbachweg 63 • 3700 Spiez, Switzerland Phone +41 (0)33 655 61 61 • fans@colasit.com



