

Tuyau de ventilation, pièces de forme rondes

Tuyau de ventilation

Feuille de dimensions

1024239



Matériau

PPs

Pression de service du tuyau de ventilation

+/- 1500 Pa, 40°C

Pression de service Tuyau composé de plaques -300, +1500 Pa, 40°C

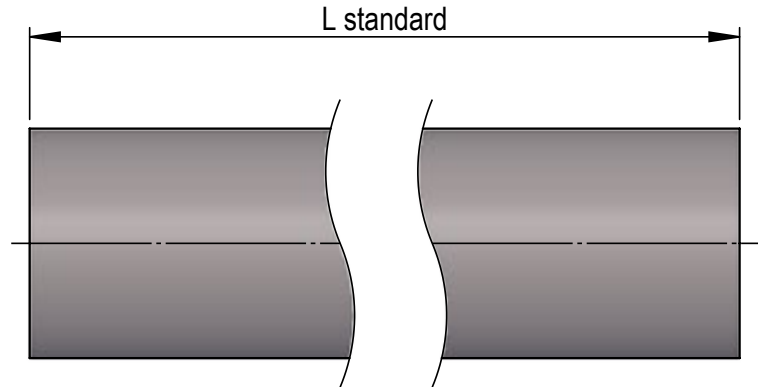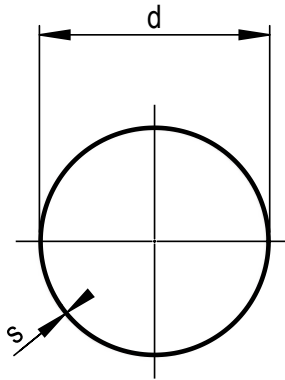

NG	Tuyau de ventilation			Tuyau en plaques		
	S	L	Numéro d'article	S	L	Numéro d'article
50	3	5000	12103			
63	3	5000	12104			
75	3	5000	12105			
90	3	5000	12106			
110	3	5000	12217			
125	3	5000	12218			
140	3	5000	14722			
160	3	5000	12220			
180	3	5000	12221			
200	3	5000	12222			
225	3.5	5000	12223			
250	3.5	5000	12224			
280	4	5000	12225			
315	5	5000	12226			
355	5	5000	12231			
400	6	5000	12232			
450	7	5000	12227			
500	8	5000	12228			
560	8	5000	20686			
630	10	5000	12229	5	3000	20697
710	12	5000	12230	5	3000	20698
800				6	3000	20699
900				6	3000	20700
1000				8	3000	20701
1120				8	3000	20702
1250				8	3000	20703

Edition 2023 • sous réserve de modification technique • Copyright by COLASIT AG Spiez

COLASIT AG

Constructions en plastique • Faulenbachweg 63 • CH-3700 Spiez

Tél. +41 (0)33 655 61 61 • ventilations@colasit.com

www.colasit.com

Competence in plastics. Worldwide.

