

Overview

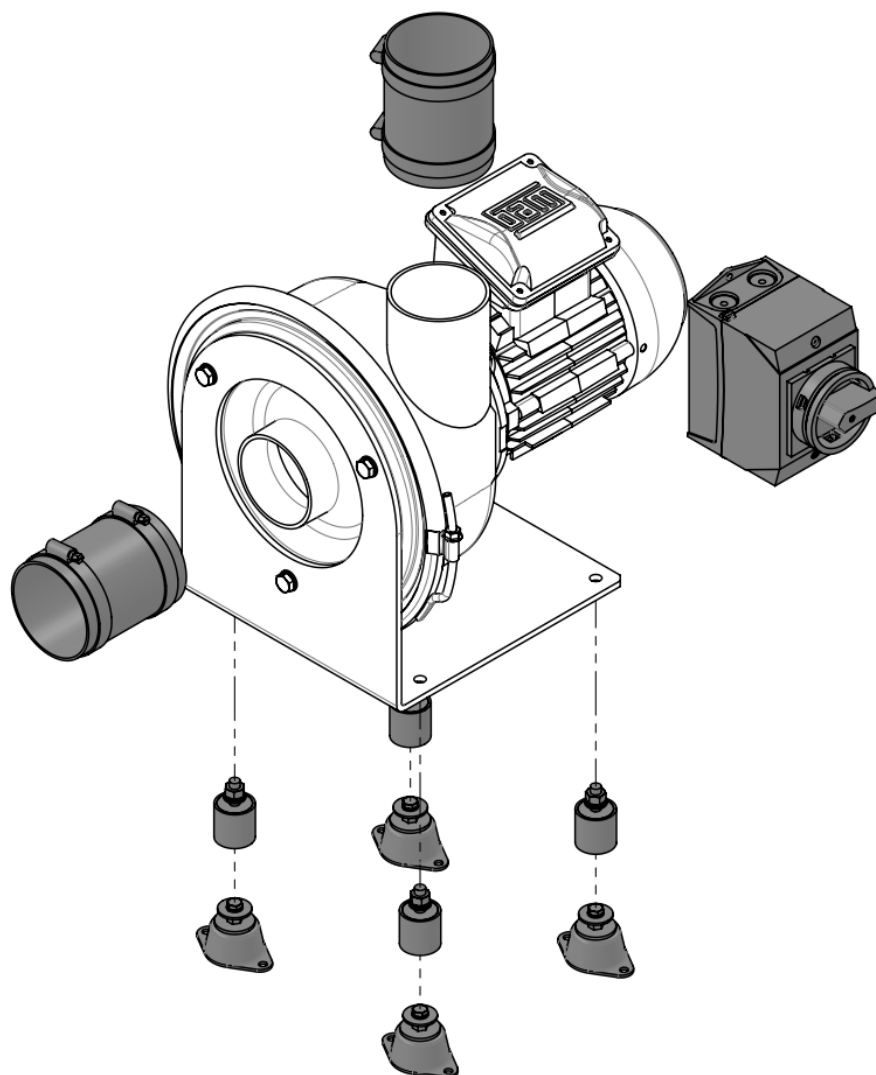




Table of contents

Sleeve round with hose clamps *	2
Vibration absorber / bell damper for floor/ceiling mounting *	3
Frequency converter for speed control	4
Isolation switch	4

*Required selection for operation

Sleeve round with hose clamps *

- Material Soft PVC (sleeve)
 Stainless steel (hose clamp)

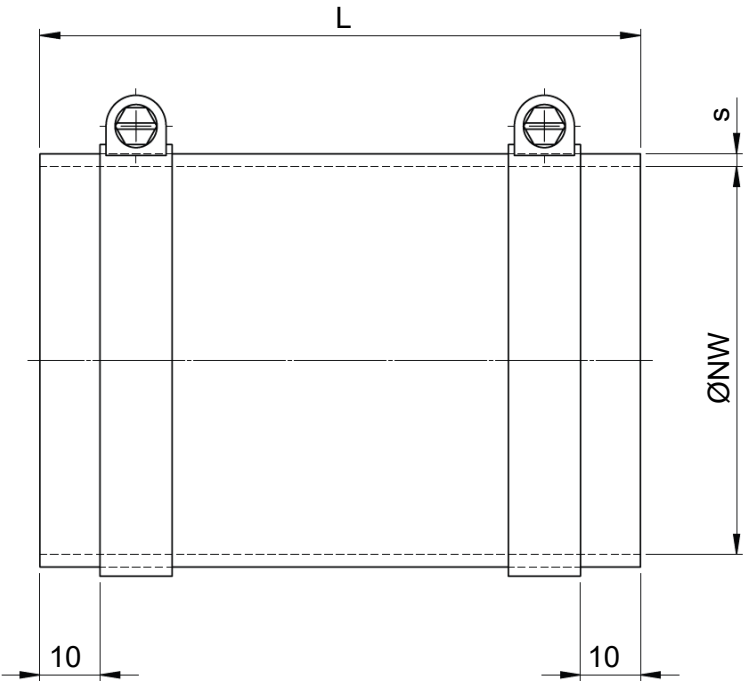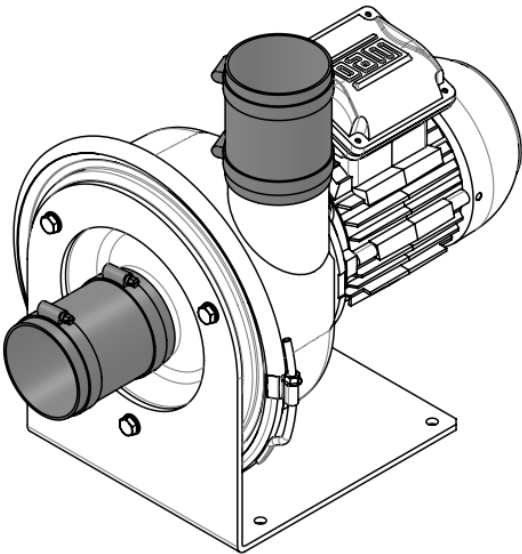


NW Ø	L	s
75	100	2

Edition 2025 • Subject to alteration • Copyright by COLASIT AG Spiez




Vibration absorber / bell damper for floor/ceiling mounting *



- Material
 - Natural rubber (vibration element)
 - Galvanised, stainless steel (mounting vibration damper)
 - Galvanised (mounting bell damper)

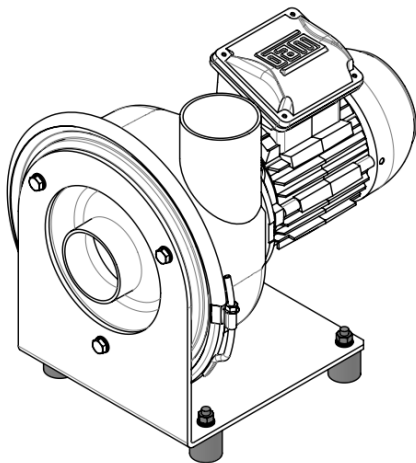

Vibration absorber for floor mounting

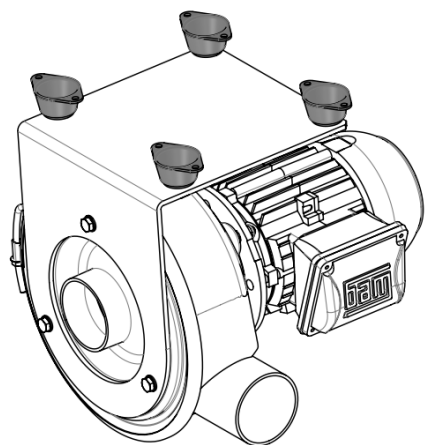

Bell damper for ceiling mounting

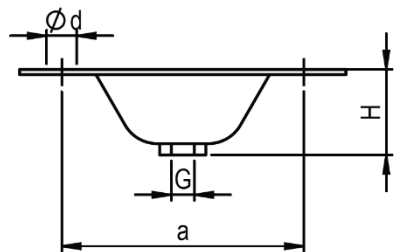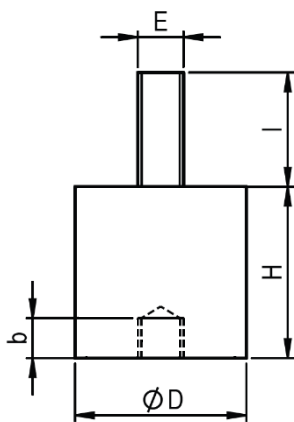

Round isolators type	Dimensions					Max. load per pc.
	D	H	E	I	b	
30/30, B	30	30	M8	20	7	50 kg


Bell damper type	Dimensions				Max. load per pc.
	H	G	a	d	
M6	33	M6	58	6,5	16 kg

Fan type	Floor mounting	Ceiling mounting	Number of elements
CKV 75	30/30, B	M6	4


Frequency converter for speed control

Frequency converter

- Protection class IP20 until IP55
- Speed adjustment Stepless with internal control signal
Stepless with external control signal



*Frequency converter IP20
for control cabinet installation*

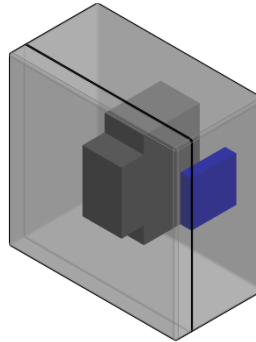

*Frequency converter IP55
for external installation*

Isolation switch

- Protection class IP66
- Revision protection: lockable

