




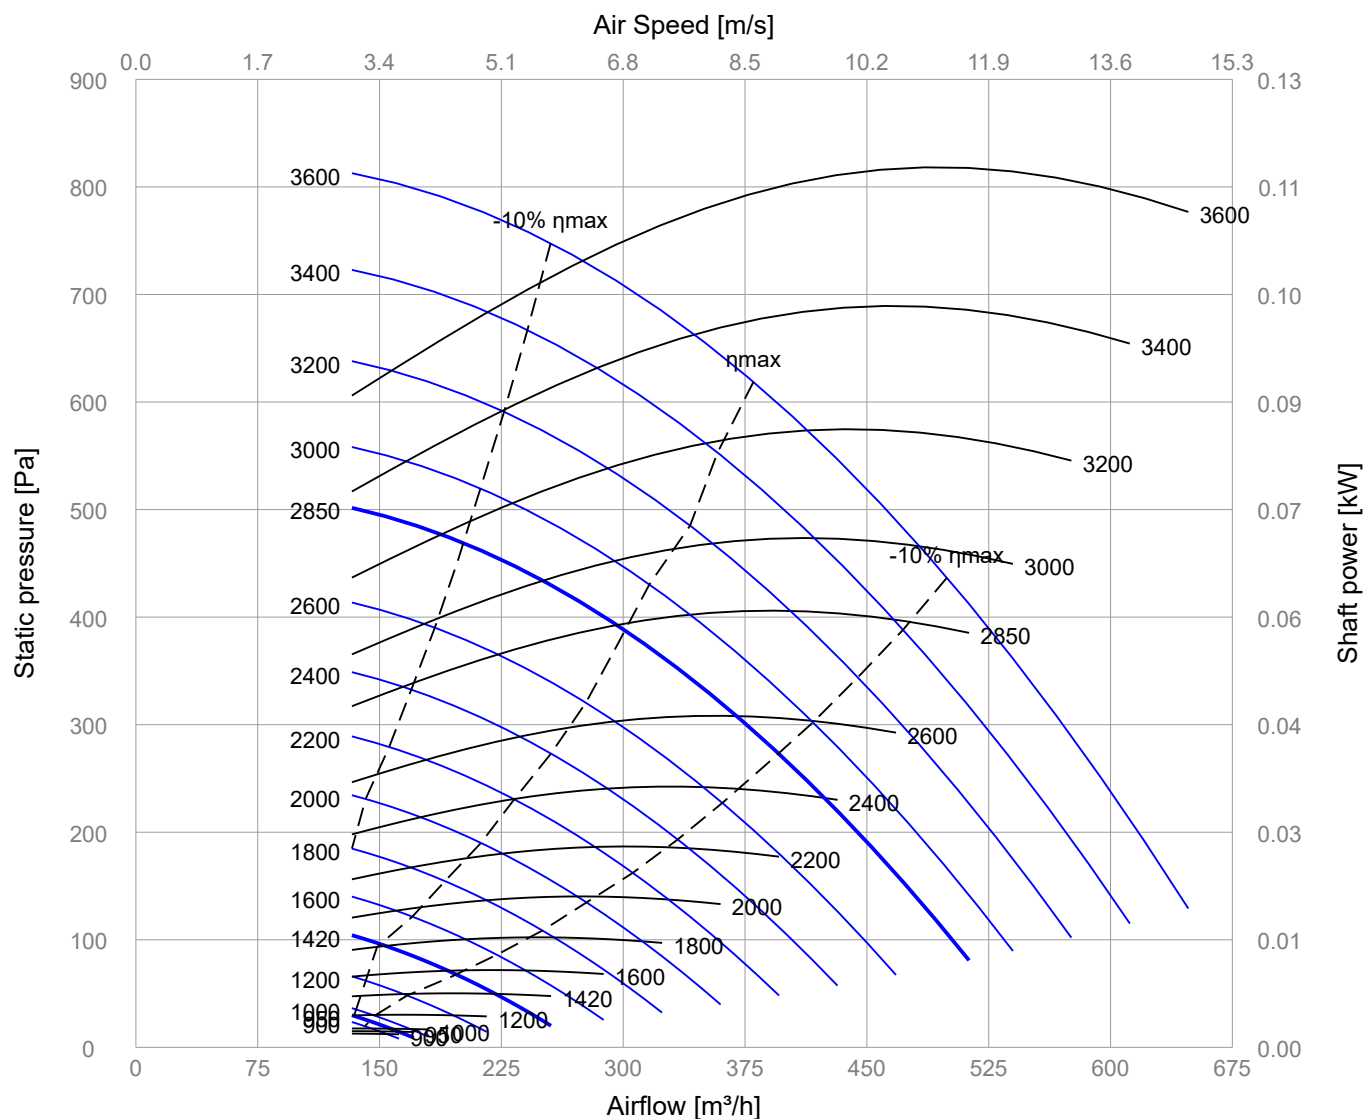


| Sound niveau level LwA dB(A) |       | Sound power level LpA = LwA - 7 dB(A) |     |     |     |      |      |      | Dist. 1 m |  |
|------------------------------|-------|---------------------------------------|-----|-----|-----|------|------|------|-----------|--|
| ISO 5136                     |       |                                       |     |     |     |      |      |      |           |  |
| n                            | LwA   | Hz                                    |     |     |     |      |      |      |           |  |
| min <sup>-1</sup>            | dB(A) | 63                                    | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000      |  |
| 3600                         | 68    | 29                                    | 38  | 49  | 57  | 61   | 62   | 64   | 49        |  |
| 2850                         | 62    | 23                                    | 32  | 43  | 51  | 55   | 56   | 58   | 43        |  |
| 1800                         | 52    | 13                                    | 22  | 33  | 41  | 45   | 46   | 48   | 33        |  |
| 1420                         | 47    | 8                                     | 17  | 28  | 36  | 40   | 41   | 43   | 28        |  |
| 950                          | 39    | 0                                     | 9   | 20  | 28  | 32   | 33   | 35   | 20        |  |
| 900                          | 37    | 0                                     | 7   | 18  | 26  | 30   | 31   | 33   | 18        |  |
| 710                          | 32    | 0                                     | 2   | 13  | 21  | 25   | 26   | 28   | 13        |  |

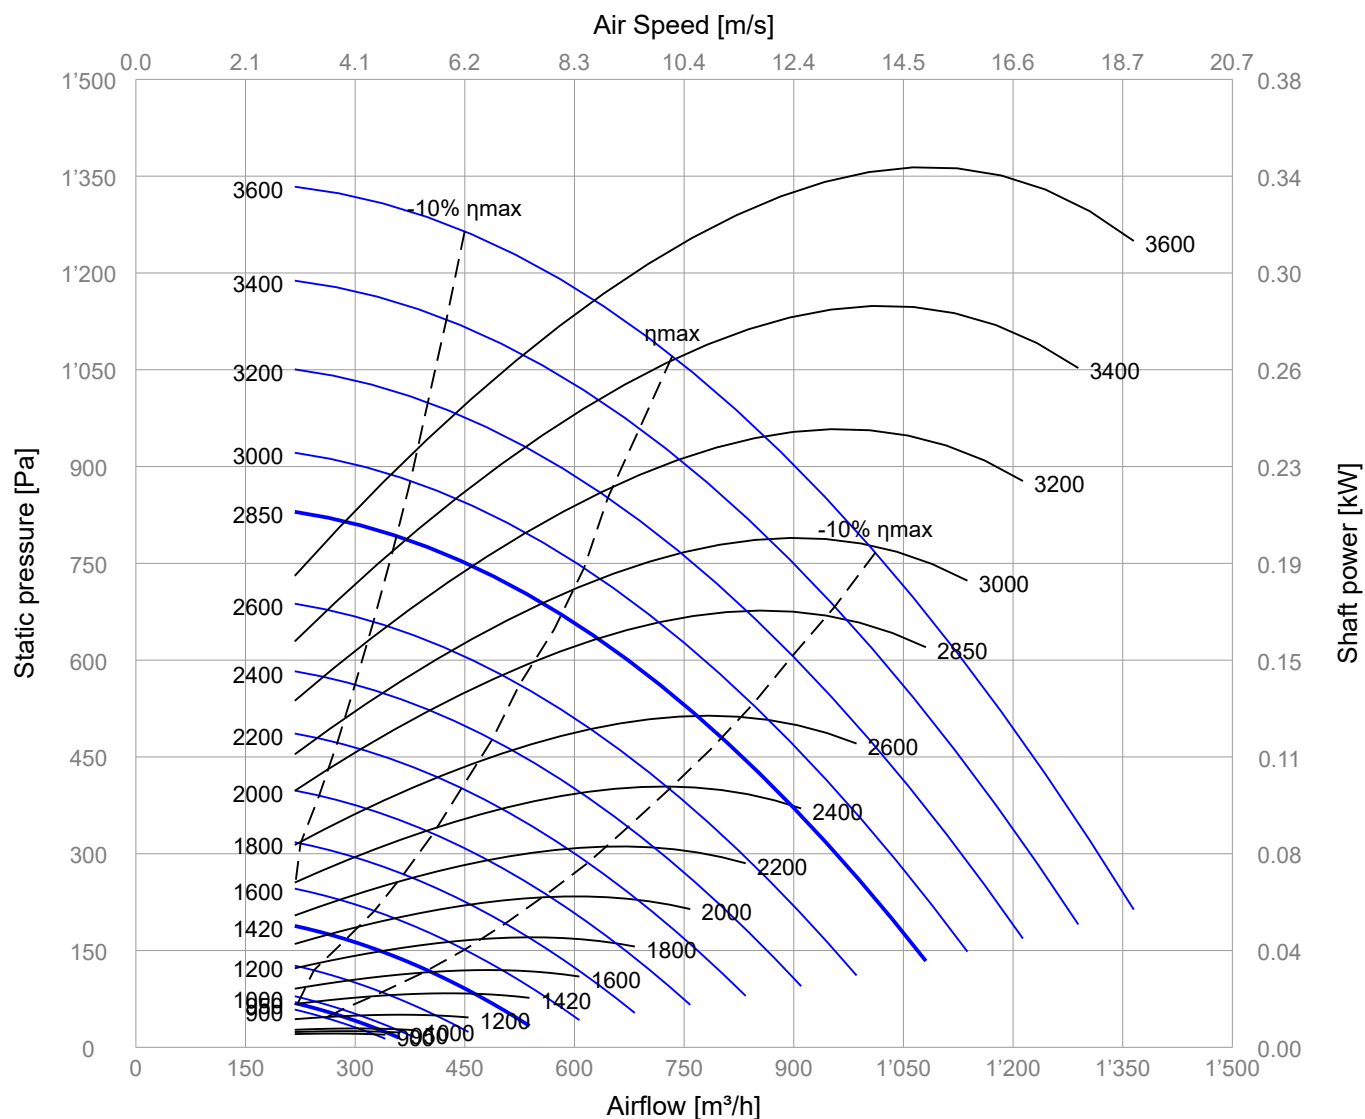


| Sound niveau level LwA dB(A) |       | Sound power level LpA = LwA - 7 dB(A) |     |     |     |      |      |      | Dist. 1 m |
|------------------------------|-------|---------------------------------------|-----|-----|-----|------|------|------|-----------|
| ISO 5136                     |       |                                       |     |     |     |      |      |      |           |
| n                            | LwA   | Hz                                    |     |     |     |      |      |      |           |
| min <sup>-1</sup>            | dB(A) | 63                                    | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000      |
| 3600                         | 73    | 39                                    | 38  | 53  | 59  | 70   | 68   | 65   | 54        |
| 2850                         | 67    | 33                                    | 32  | 47  | 53  | 64   | 62   | 59   | 48        |
| 1800                         | 57    | 23                                    | 22  | 37  | 43  | 54   | 52   | 49   | 38        |
| 1420                         | 52    | 18                                    | 17  | 32  | 38  | 49   | 47   | 44   | 33        |
| 950                          | 44    | 10                                    | 9   | 24  | 30  | 41   | 39   | 36   | 25        |
| 900                          | 42    | 8                                     | 7   | 22  | 28  | 39   | 37   | 34   | 23        |
| 710                          | 37    | 3                                     | 2   | 17  | 23  | 34   | 32   | 29   | 18        |

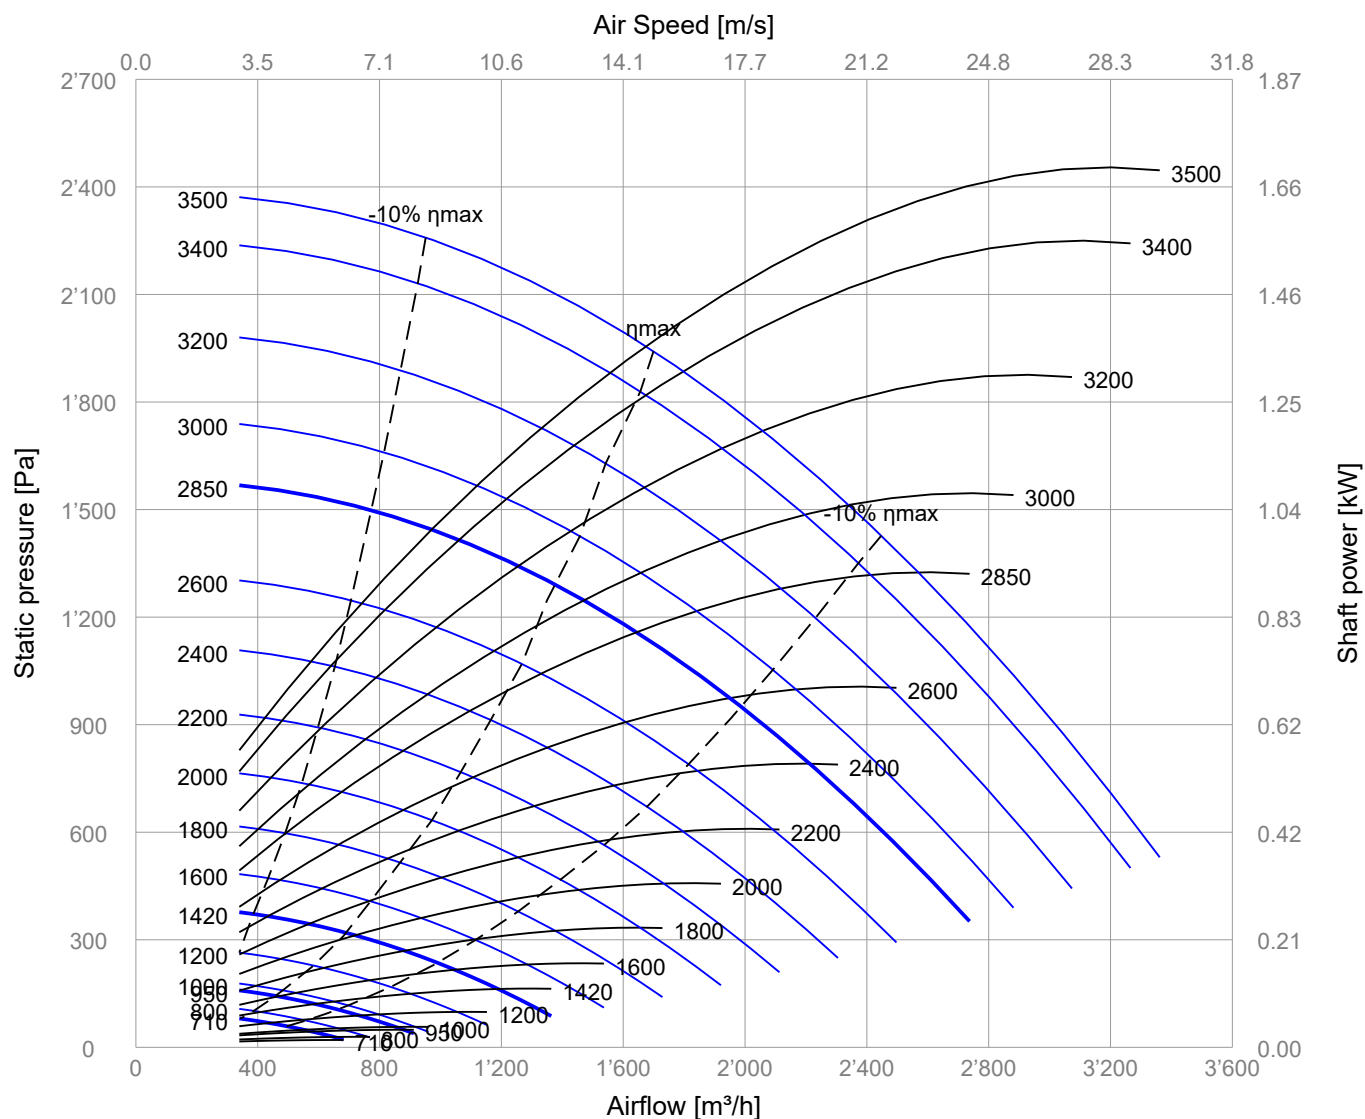


| Sound niveau level LwA dB(A) |       | Sound power level LpA = LwA - 7 dB(A) |     |     |     |      |      |      | Dist. 1 m |
|------------------------------|-------|---------------------------------------|-----|-----|-----|------|------|------|-----------|
| ISO 5136                     |       |                                       |     |     |     |      |      |      |           |
| n                            | LwA   | Hz                                    |     |     |     |      |      |      |           |
| min <sup>-1</sup>            | dB(A) | 63                                    | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000      |
| 3500                         | 78    | 35                                    | 50  | 61  | 70  | 75   | 73   | 66   | 56        |
| 2850                         | 73    | 30                                    | 45  | 56  | 65  | 70   | 68   | 61   | 51        |
| 1800                         | 63    | 20                                    | 35  | 46  | 55  | 60   | 58   | 51   | 41        |
| 1420                         | 58    | 15                                    | 30  | 41  | 50  | 55   | 53   | 46   | 36        |
| 950                          | 50    | 7                                     | 22  | 33  | 42  | 47   | 45   | 38   | 28        |
| 710                          | 43    | 0                                     | 15  | 26  | 35  | 40   | 38   | 31   | 21        |

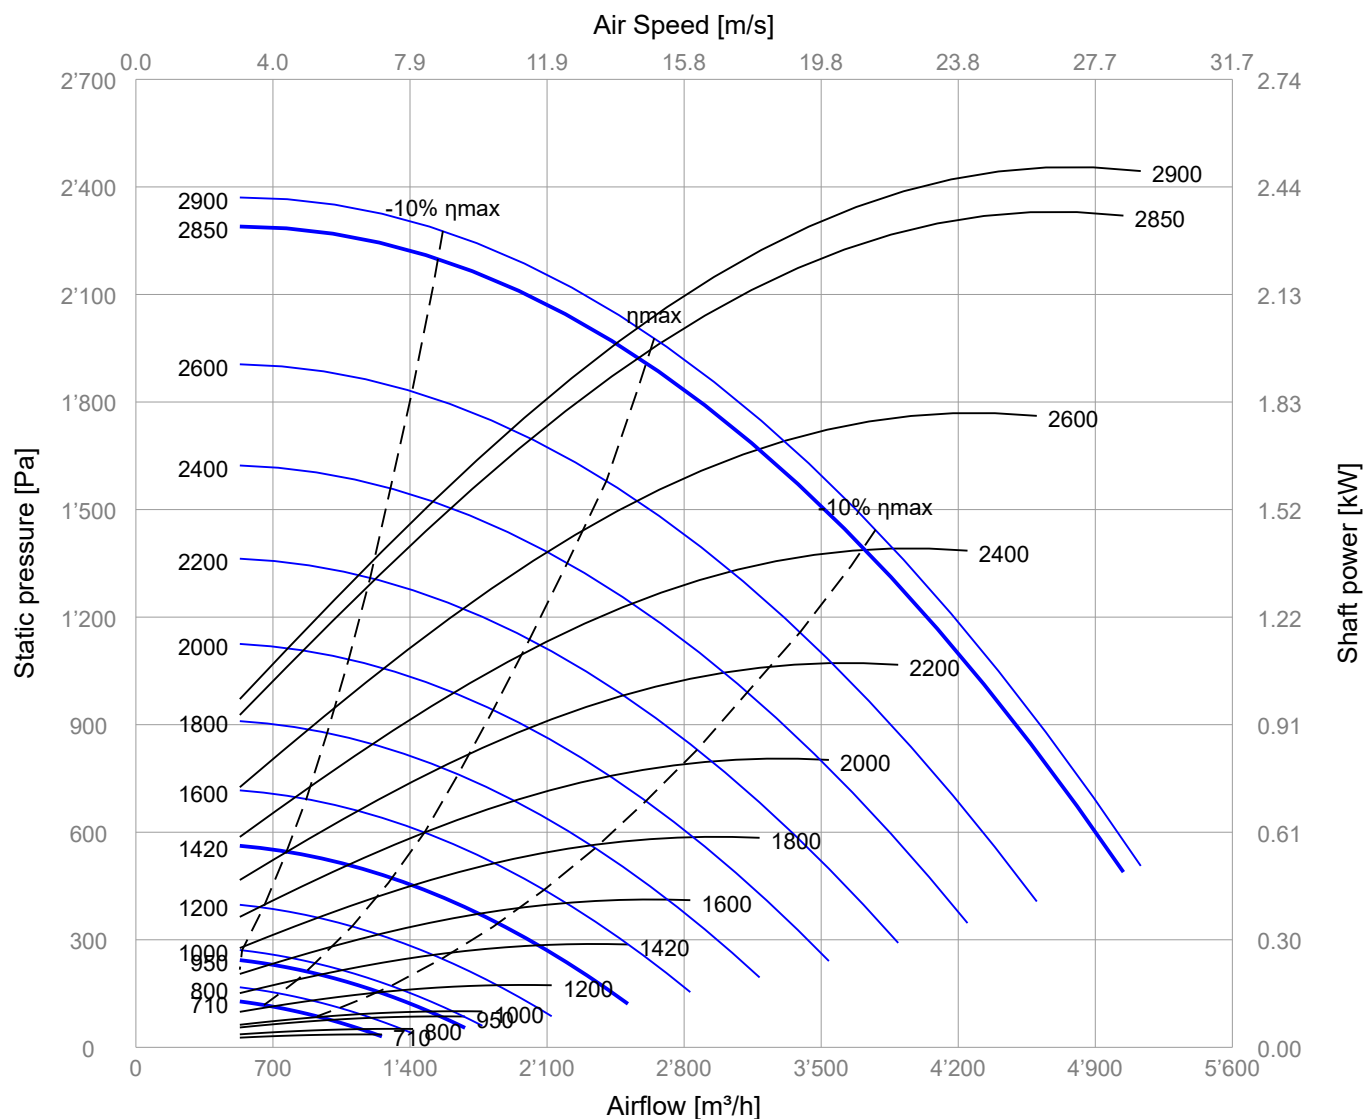


| Sound niveau level LwA dB(A) |       |    |     |     | Sound power level LpA = LwA - 7 dB(A) |      |      |      | Dist. 1 m |
|------------------------------|-------|----|-----|-----|---------------------------------------|------|------|------|-----------|
| ISO 5136                     |       |    |     |     |                                       |      |      |      |           |
| n                            | LwA   | Hz |     |     |                                       |      |      |      |           |
| min <sup>-1</sup>            | dB(A) | 63 | 125 | 250 | 500                                   | 1000 | 2000 | 4000 | 8000      |
| 2900                         | 86    | 49 | 61  | 68  | 76                                    | 83   | 80   | 70   | 58        |
| 2850                         | 85    | 48 | 60  | 67  | 75                                    | 82   | 79   | 69   | 57        |
| 1420                         | 70    | 33 | 45  | 52  | 60                                    | 67   | 64   | 54   | 42        |
| 950                          | 62    | 25 | 37  | 44  | 52                                    | 59   | 56   | 46   | 34        |
| 710                          | 55    | 18 | 30  | 37  | 45                                    | 52   | 49   | 39   | 27        |

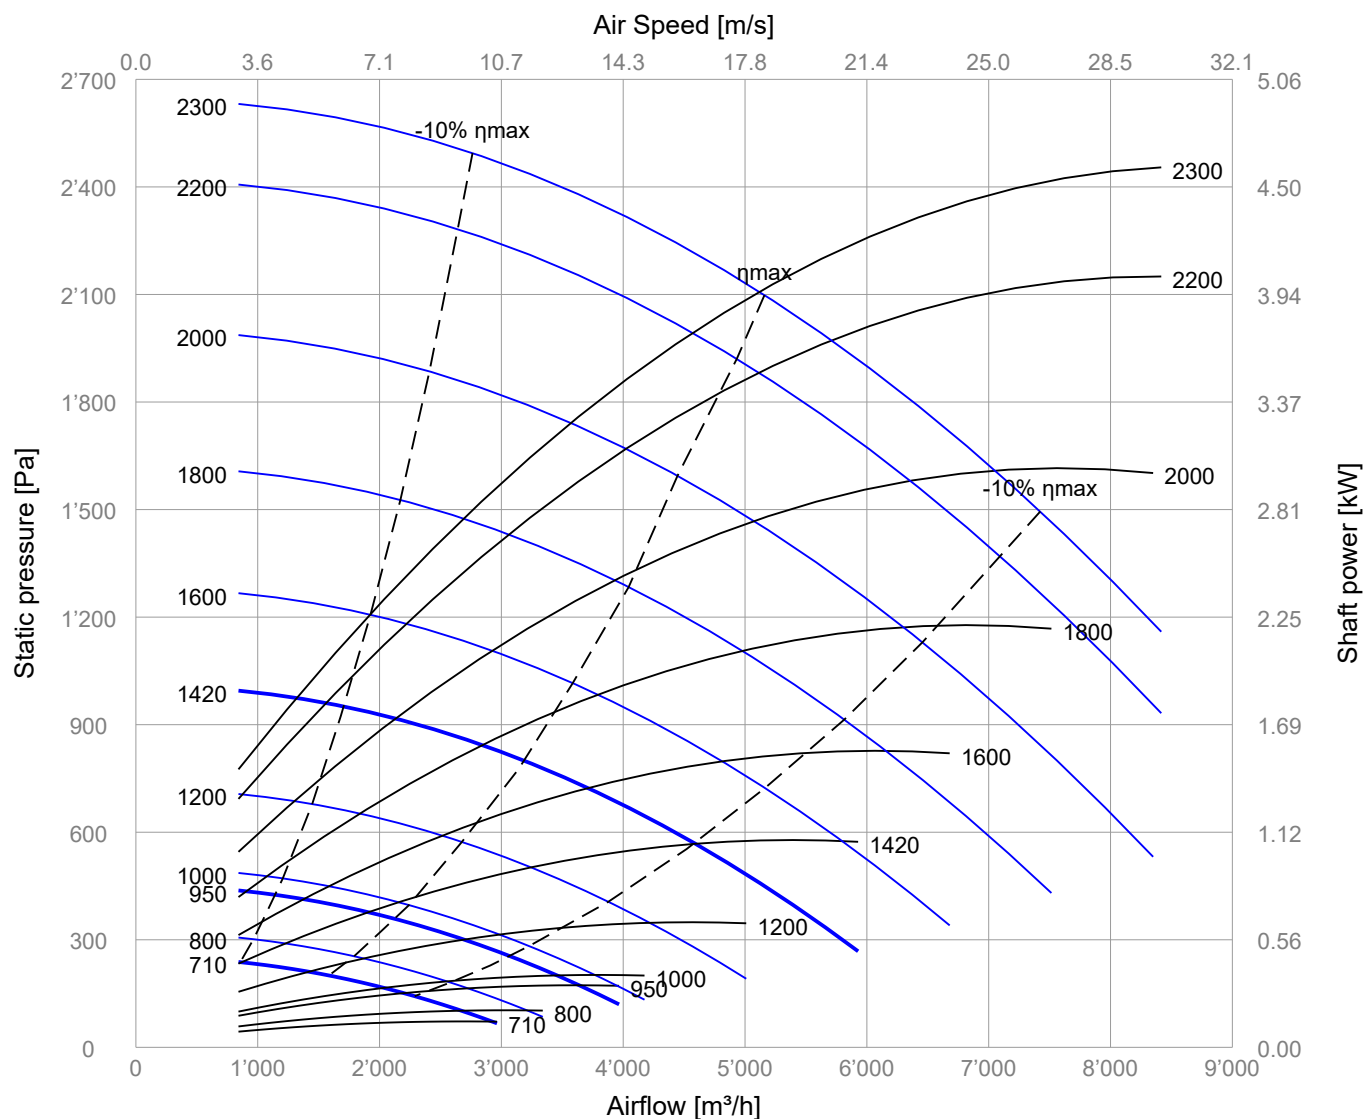


| Sound niveau level LwA dB(A) |       | Sound power level LpA = LwA - 7 dB(A) |     |     |     |      |      |      | Dist. 1 m |
|------------------------------|-------|---------------------------------------|-----|-----|-----|------|------|------|-----------|
| ISO 5136                     |       |                                       |     |     |     |      |      |      |           |
| n                            | LwA   | Hz                                    |     |     |     |      |      |      |           |
| min <sup>-1</sup>            | dB(A) | 63                                    | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000      |
| 2850                         | 85    | 63                                    | 66  | 74  | 77  | 84   | 73   | 67   | 63        |
| 2300                         | 81    | 59                                    | 62  | 70  | 73  | 80   | 69   | 63   | 59        |
| 1420                         | 70    | 48                                    | 51  | 59  | 62  | 69   | 58   | 52   | 48        |
| 1200                         | 67    | 45                                    | 48  | 56  | 59  | 66   | 55   | 49   | 45        |
| 950                          | 62    | 40                                    | 43  | 51  | 54  | 61   | 50   | 44   | 40        |
| 710                          | 55    | 33                                    | 36  | 44  | 47  | 54   | 43   | 37   | 33        |

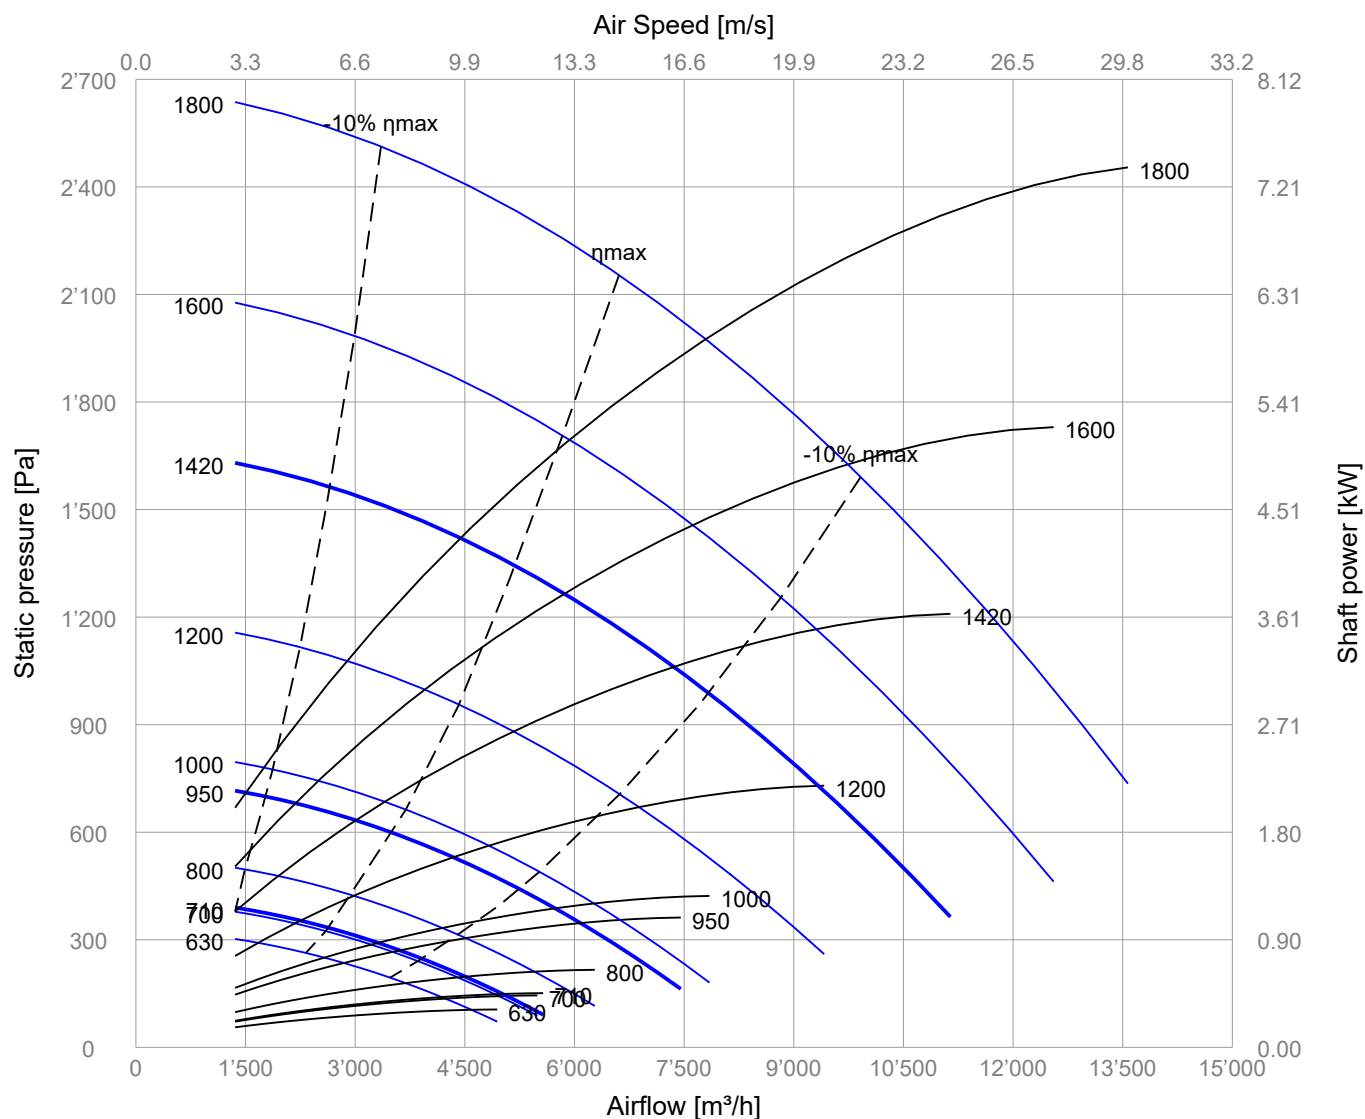


| Sound niveau level LwA dB(A) |       | Sound power level LpA = LwA - 7 dB(A) |     |     |     |      |      |      | Dist. 1 m |
|------------------------------|-------|---------------------------------------|-----|-----|-----|------|------|------|-----------|
| ISO 5136                     |       |                                       |     |     |     |      |      |      |           |
| n                            | LwA   | Hz                                    |     |     |     |      |      |      |           |
| min <sup>-1</sup>            | dB(A) | 63                                    | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000      |
| 2850                         | 88    | 64                                    | 68  | 78  | 84  | 84   | 78   | 78   | 70        |
| 1800                         | 78    | 54                                    | 58  | 68  | 74  | 74   | 68   | 68   | 60        |
| 1420                         | 73    | 49                                    | 53  | 63  | 69  | 69   | 63   | 63   | 55        |
| 950                          | 65    | 41                                    | 45  | 55  | 61  | 61   | 55   | 55   | 47        |
| 710                          | 58    | 34                                    | 38  | 48  | 54  | 54   | 48   | 48   | 40        |
| 630                          | 56    | 32                                    | 36  | 46  | 52  | 52   | 46   | 46   | 38        |

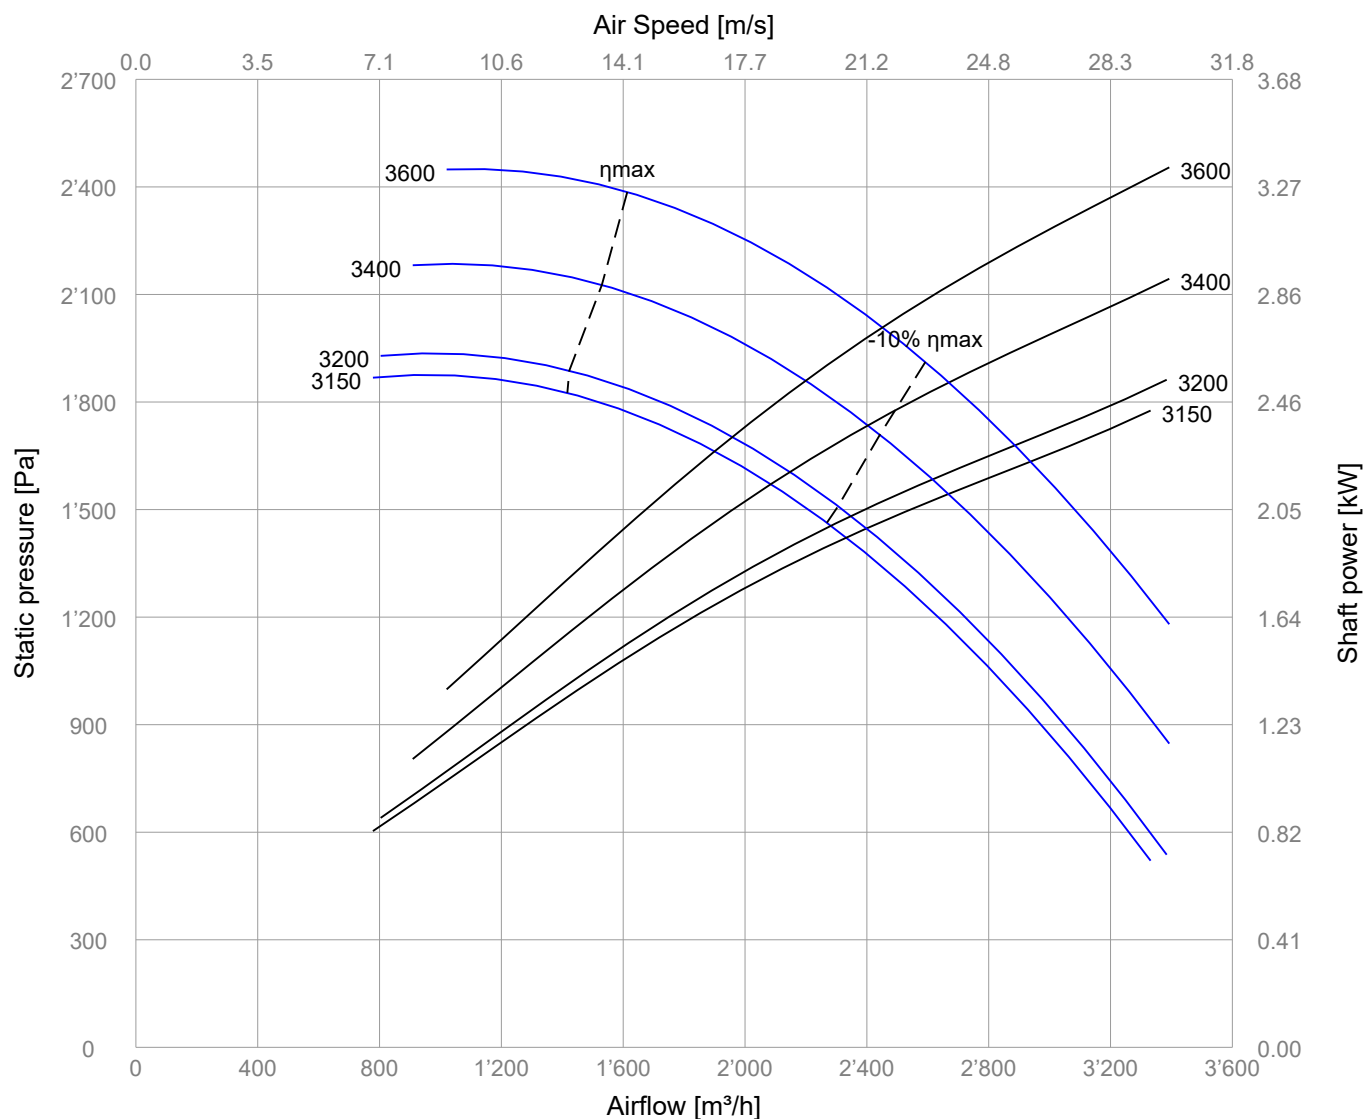

| Sound niveau level LwA dB(A) |       | Sound power level LpA = LwA - 7 dB(A) |     |     |     |      |      |      | Dist. 1 m |
|------------------------------|-------|---------------------------------------|-----|-----|-----|------|------|------|-----------|
| ISO 5136.2                   |       |                                       |     |     |     |      |      |      |           |
| n                            | LwA   | Hz                                    |     |     |     |      |      |      |           |
| min <sup>-1</sup>            | dB(A) | 63                                    | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000      |
| 3600                         | 83    | 39                                    | 56  | 65  | 70  | 79   | 80   | 70   | 58        |
| 3150                         | 80    | 36                                    | 53  | 62  | 67  | 76   | 77   | 67   | 55        |
| 2850                         | 77    | 33                                    | 50  | 59  | 64  | 73   | 74   | 64   | 52        |
| 1420                         | 62    | 18                                    | 35  | 44  | 49  | 58   | 59   | 49   | 37        |
| 950                          | 54    | 10                                    | 27  | 36  | 41  | 50   | 51   | 41   | 29        |
| 710                          | 47    | 3                                     | 20  | 29  | 34  | 43   | 44   | 34   | 22        |

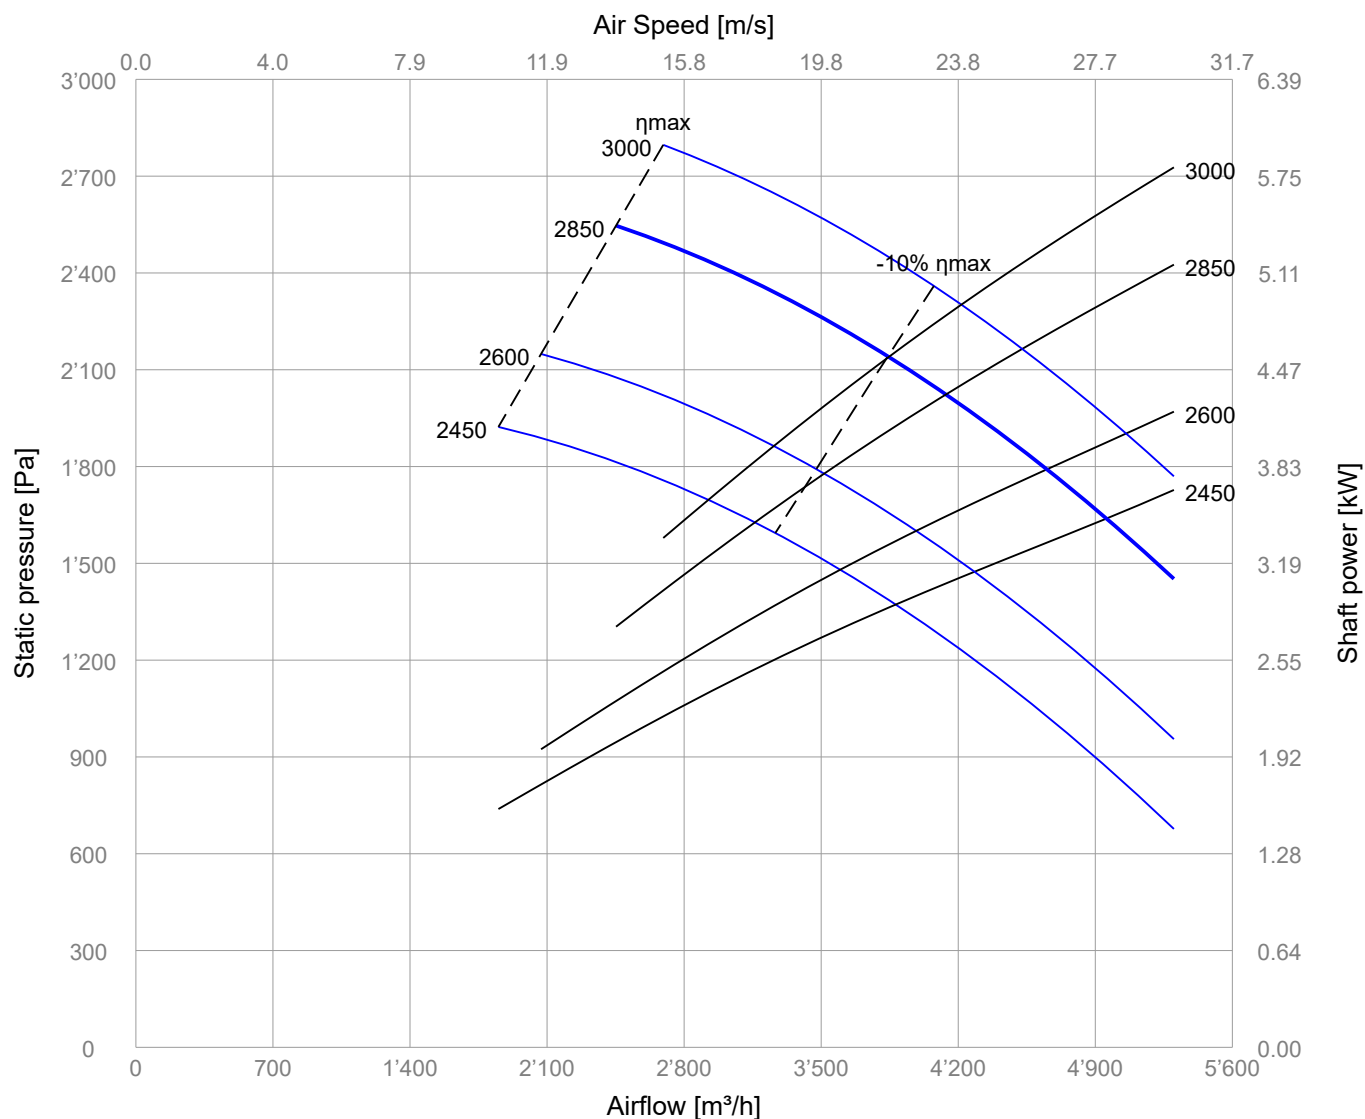

| Sound niveau level LwA dB(A) |       | Sound power level LpA = LwA - 7 dB(A) |     |     |     |      |      |      | Dist. 1 m |
|------------------------------|-------|---------------------------------------|-----|-----|-----|------|------|------|-----------|
| ISO 5136.2                   |       |                                       |     |     |     |      |      |      |           |
| n                            | LwA   | Hz                                    |     |     |     |      |      |      |           |
| min <sup>-1</sup>            | dB(A) | 63                                    | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000      |
| 3000                         | 86    | 50                                    | 65  | 73  | 76  | 82   | 81   | 73   | 61        |
| 2850                         | 84    | 48                                    | 63  | 71  | 74  | 80   | 79   | 71   | 59        |
| 2450                         | 81    | 45                                    | 60  | 68  | 71  | 77   | 76   | 68   | 56        |
| 1420                         | 69    | 33                                    | 48  | 56  | 59  | 65   | 64   | 56   | 44        |
| 950                          | 61    | 25                                    | 40  | 48  | 51  | 57   | 56   | 48   | 36        |
| 710                          | 54    | 18                                    | 33  | 41  | 44  | 50   | 49   | 41   | 29        |

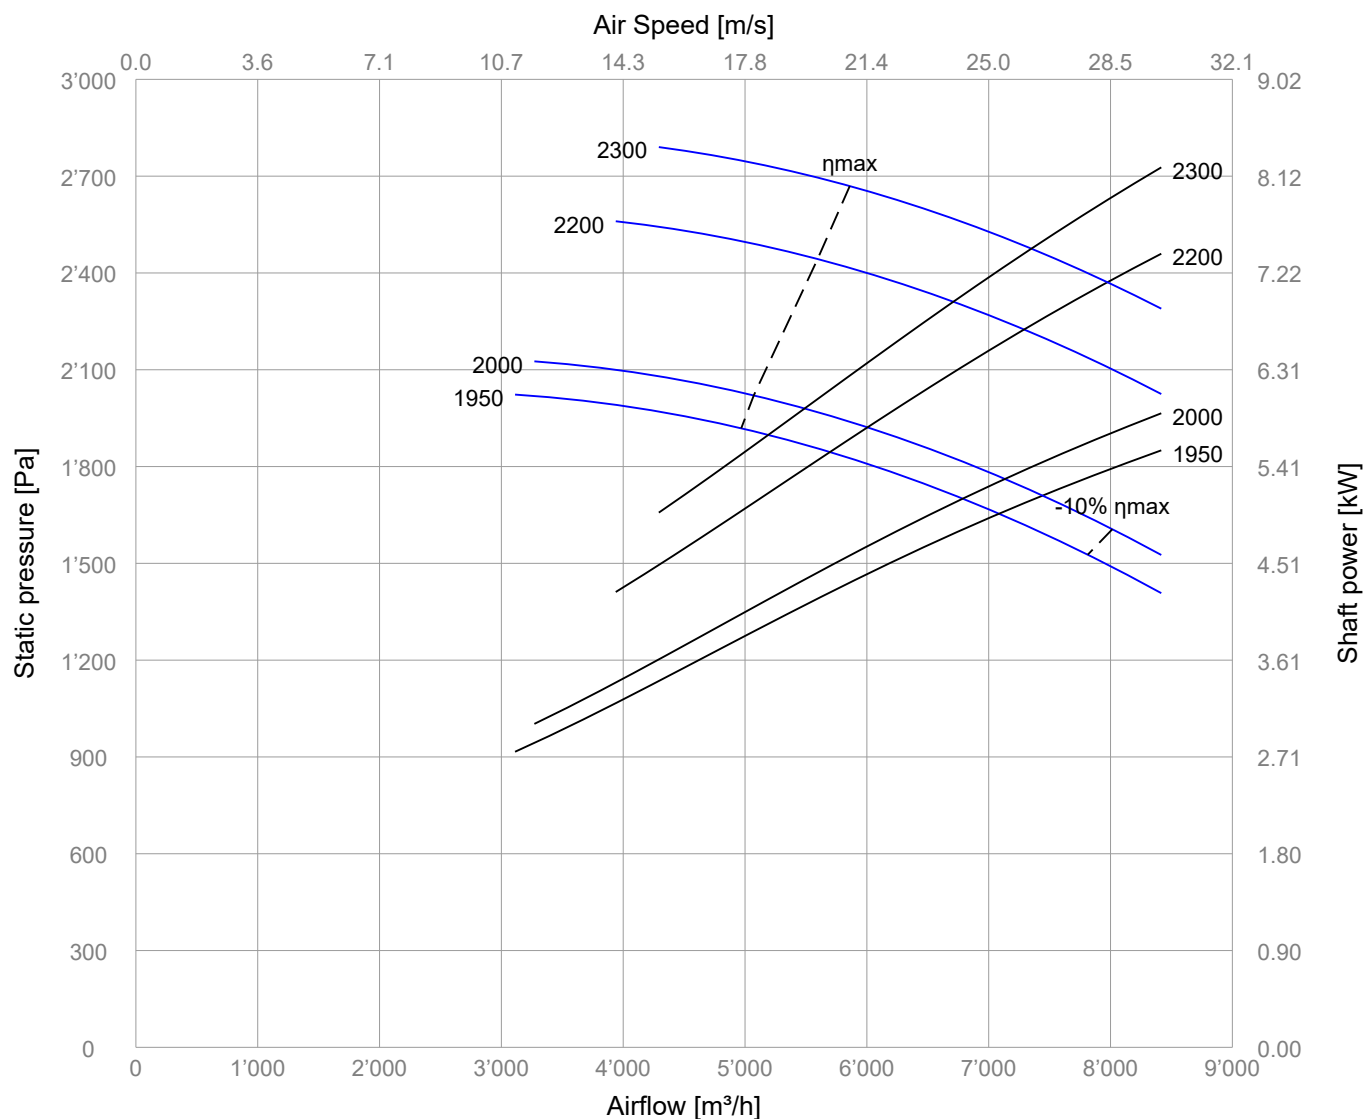

| Sound niveau level LwA dB(A) |       | Sound power level LpA = LwA - 7 dB(A) |     |     |     |      |      |      | Dist. 1 m |  |
|------------------------------|-------|---------------------------------------|-----|-----|-----|------|------|------|-----------|--|
| ISO 5136.2                   |       |                                       |     |     |     |      |      |      |           |  |
| n                            | LwA   | Hz                                    |     |     |     |      |      |      |           |  |
| min <sup>-1</sup>            | dB(A) | 63                                    | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000      |  |
| 2850                         | 91    | 64                                    | 75  | 84  | 84  | 86   | 83   | 77   | 67        |  |
| 2300                         | 87    | 60                                    | 71  | 80  | 80  | 82   | 79   | 73   | 63        |  |
| 1950                         | 83    | 56                                    | 67  | 76  | 76  | 78   | 75   | 69   | 59        |  |
| 1420                         | 76    | 49                                    | 60  | 69  | 69  | 71   | 68   | 62   | 52        |  |
| 950                          | 68    | 41                                    | 52  | 61  | 61  | 63   | 60   | 54   | 44        |  |
| 710                          | 61    | 34                                    | 45  | 54  | 54  | 56   | 53   | 47   | 37        |  |